

Hi-Temp AC/DC Plug & Play Power Supply Series 400W-600W

Xhite

400W, 600W

AC/DC Hi-Temp Power Supply

Ultra-high efficiency 1U size

-20°C to +70°C operating ambient temp

1.5V to 58V standard output voltages

All outputs fully floating

Extra low profile: 1U height (40mm)

Ultra high efficiency, up to 90%

Plug & Play Power

allows fast custom configuration

allow easy maintenance logistics

Reduced system heat dissipation

Few electrolytic capacitors (all long life)

Visual LED indicators

Series / Parallel of multiple outputs

5V bias standby voltage provided

Individual output control signals



patents pending



Applications include:

Industrial equipment, Telecommunications, Outdoor display systems

The Xhite family of high temperature power supplies provides up to 600W in an extremely compact 1U x 260 x 127mm package. Designed as a configurable power supply, the Xhite family employs the innovative plug and play architecture that allows users to instantly configure a custom power solution in less than 5 minutes.

The Xhite family is ideal for use in harsh environments where there can be high ambient temperatures and wide temperature fluctuations. Operation at higher temperatures is made possible through employment of leading edge technologies and cooling techniques, making it possible for the Xhite to achieve unprecedented efficiencies of up to 90%.

The Xhite family consists of 2 powerPac models ranging in power levels from 400W to 600W. Each model may be populated with up to 6 powerMods selected from the table of powerMods shown below.

All configurations carry full safety agency approvals, UL60950, EN60950 and are CE marked.

powerMods*


MODEL	Vmin	Vnom	Vmax	I _{max}	Watts*
Xg1	1.5	2.5	3.6	25A	65W
Xg2	3.2	5.0	6.0	20A	100W
Xg3	6.0	12.0	15.0	10A	120W
Xg4	12.0	24.0	30.0	5A	120W
Xg5	28.0	48.0	58.0	3A	144W
Xg7	5.0	24.0	28.0	2.5A	60W
Xg8	v1	5.0	24.0	1.5A	36W
	v2	5.0	24.0	1.5A	36W

powerPacs


	MODEL	Watts
Xhite	XHA	400W
	XHB	600W

powerMod ratings when used with Xhite powerPac
*see datasheet powerMods for full output module specifications

EFFICIENCY (typical)

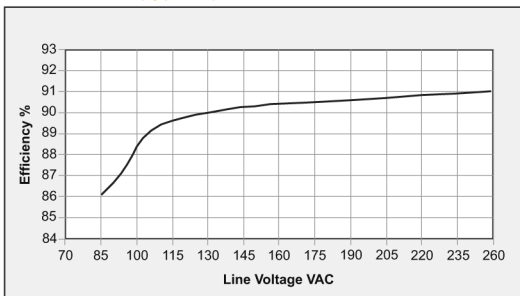

MECHANICAL SPECIFICATIONS

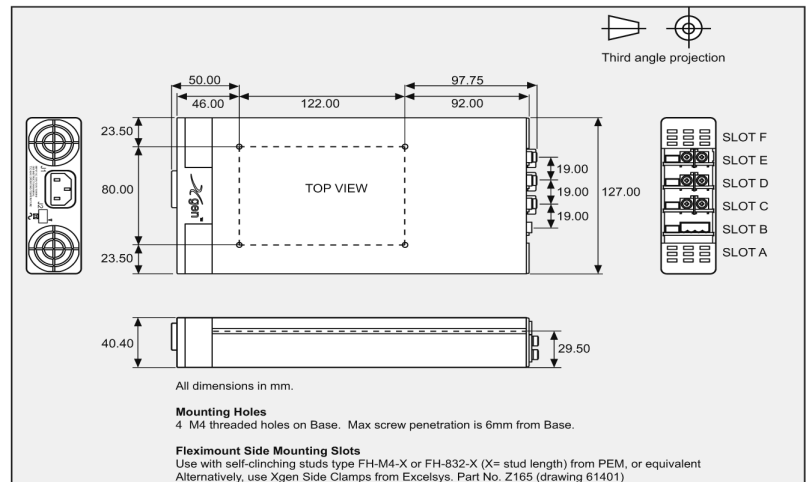

AC/DC Einbaunetzgeräte

SPECIFICATION applies to configured units consisting of powerMods modules plugged into the appropriate powerPac

INPUT					
Parameter	Conditions/Description	Min	Nom	Max	Unit s
Input Voltage Range	Universal Input	85 120		264 380	VAC VDC
Input Frequency Range		47		63	Hz
Power Rating	XHA			400	W
	XHB			600	W
Input Current	XHA		6.5		A
	XHB		7.5		A
Inrush Current	230V AC @ 25°C			25	A
Undervoltage Lockout	Shut down	65		74	VAC
Fusing	XHA	250V		F10A HRC F12A HRC	
	XHB	250V			
OUTPUT					
Parameter	Conditions/Description	Min	Nom	Max	Unit s
powerMod Power	As per powerMod table				
Output Adjustment Range	Manual: Multi-turn potentiometer. As per powerMod table Electronic: See Xgen Designers' Manual				
Minimum Load			0		A
Line Regulation	For ±10% change from nominal line			±0.1	%
Load & Cross Regulation	For 25% to 75% load change			±0.2	%
Transient Response	For 25% to 75% load change			10 250	% µs
	Voltage Deviation Settling Time				
Ripple and Noise	20MHz Bandwidth			1.0	% pk-pk
Overvoltage Protection	1st level: Vset Tracking. 2nd level: Vmax (Latching)	110		125	%
Overcurrent Protection	Straight line with hiccup activation at <30% of Vnom See powerMod datasheet and Designer's Manual for full details	110		120	%
Remote Sense	Max. line drop compensation. (except Xg7, Xg8)			0.5	VDC
Overshoot				2	%
Turn-on Delay	From AC In / Enable signal			300 / 30	ms
Rise Time	Monotonic			5	ms
Hold-up Time	For nominal output volt ages at full load.	20			ms
Output Isolation	Output to Output / Output to Chassis	500 / 500			VDC
GENERAL					
Parameter	Conditions/Description	Min	Nom	Max	Unit s
Isolation Voltage	Input to Output Input to Chassis	3000 1500			VAC VAC
Efficiency	230V AC, 900W @ 24V		90		%
Safety Agency Approvals	EN60950, UL60950, CSA22.2 No.950 UL File No. E181875				
Leakage Current	250V AC, 60Hz, 25°C			1.5	mA
Signals	See Xgen Series datasheet				
Bias Supply	Always ON. Current 250mA	4.9	5.0	5.1	VDC
Reliability	Failures per million hours at 25°C and full load See Designers' Manual. powerPac excludes fans		powerMod powerPac	1.0 0.6	fpmh fpmh
EMC					
Parameter	Standard	Level			Unit s
Emissions					
Conducted	EN5501 1, EN55022, FCC		Level B		
Radiated	EN5501 1, EN55022, FCC		Level B		
Harmonic Distortion	EN61000-3-2		Compliant		
Flicker and Fluctuation	EN61000-3-3		Compliant		
Immunity					
Electrostatic Discharge	EN61000-4-2		Level 4		
Radiated RFI	EN61000-4-3		Level 3		
Fast Transients - burst	EN61000-4-4		Level 4		
Input Line Surges	EN61000-4-5		Class 4		
Conducted RFI	EN61000-4-6		10		V/m
Voltage Dips	EN61000-4-1 1 (EN55024)		10		ms
ENVIRONMENTAL					
Parameter	Conditions/Description	Min	Nom	Max	Unit s
Operating Temperature	Full Load	-20		+70	°C
Storage Temperature		-40		+85	°C
Derating	None				
Relative Humidity	Non-condensing	5		95	%RH
Shock	3000 Bump s, 10G (16ms) half sine				
Vibration	1.5G	10		200	Hz

NOTES

1. This product is not intended for use as a stand alone unit and must be installed by qualified personnel.
2. The specifications contained herein are believed to be correct at time of publication and are subject to change without notice.
3. All specifications at nominal input, full load, 25°C unless otherwise stated.